

Please type a plus (+) sign inside this box -

+

PTO/SB/05 REV 1 (12/97)

Approved for use through 09/30/2000. omb 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

1999-0336 (STG162)

(103567-156902)

First Inventor or Application Identifier:

J. HEINONEN et al.

Title

APPARATUS AND METHOD FOR SYNCHRONIZATION IN A  
MULTIPLE-CARRIER COMMUNICATION SYSTEM BY OBSERVING A  
PLURALITY OF SYNCHRONIZATION INDICATORS

Express Mail Label No.

EL190972971US

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, D.C. 20231

1. ☐ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification [Total Pages 18]

(preferred arrangement set forth below)

- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention

- Brief Description of the Drawings (if filed)

- Detailed Description

- Claim(s)

- Abstract of the Disclosure

3. ☒ Drawing(s) (35 USC) 113) [Total Sheets 8]

4. ☒ Oath or Declaration [Total Pages 3]

a. ☐ Newly executed (original or copy)

b. ☐ Copy from a prior application (37 CFR 1.63(d))

(for continuation/divisional with Box 17 completed)

[Note Box 5 below]

i. ☐ DELETION OF INVENTOR(S)

Signed statement attached in the prior application, see 37  
CFR 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation by Reference (useable if Box 4b is checked)

The entire disclosure of the prior application, from which a copy  
of the oath or declaration is supplied under Box 4b, is considered  
as being part of the disclosure of the accompanying application  
and is hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)

7. ☐ Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)

a. ☐ Computer Readable Copy

b. ☐ Paper Copy (identical to computer copy)

c. ☐ Statement Verifying identity

## ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))

9. ☐ 37 CFR 3.73(b) Statement

(when there is an assignee) ☐ Power of Attorney

10. ☐ English Translation Document (if applicable)

11. ☐ Information Disclosure ☐ Copies of IDS  
Statement (IDS)/PTO-1449 Citations

12. ☐ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503) (2)

(Should be specifically itemized)

14. ☐ Small Entity ☐ Statement filed in prior application,  
Statement(s) Status still proper and desired

15. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)

16. ☒ Other: ☐ Express Mail Certification

(TOTAL PAGES: 31 + POSTCARDS)

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

Continuation ☐ Divisional ☐ Continuation-in-part (CIP) ☐

of prior application No.:        /       

Prior application information: Examiner       

Group/Art Unit       

## 18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

or

☒

Correspondence address below

(Insert Customer No. or Attach bar code label here)

NAME

ATTN: SAMUEL H. DWORETSKY

AT&T CORP.

ADDRESS

P.O. BOX 4110

CITY

MIDDLETOWN

STATE

NEW JERSEY

ZIP CODE

07748-4110

COUNTRY

USA

TELEPHONE

(908) 221-5234

FAX

(732) 368-6932

Name (Print/Type)

TERRANCE A. MEADOR

Registration No. (Attorney/Agent)

30,298

Signature

*Terrance A. Meador*

Date

14 June 2000

JC815 U.S. PTO  
09/593215



"EXPRESS MAIL" MAILING LABEL NO. ELI 90972971 US

DATE OF DEPOSIT: June 14, 2000

I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING DEPOSITED  
WITH THE UNITED STATES POSTAL SERVICE "EXPRESS MAIL POST  
OFFICE TO ADDRESSEE" SERVICE UNDER 37 CFR 1.10 ON THE DATE  
INDICATED ABOVE AND IS ADDRESSED TO THE ASSISTANT  
COMMISSIONER FOR PATENTS, WASHINGTON, D.C. 20231.

Antoinette Littlefield  
NAME

[Signature]  
SIGNATURE

Atty: Charles D. Gornitovich, Jr.  
Docket: 1999-0336 (STG 162)  
Client M: 103567-156902

# **APPARATUS AND METHOD FOR SYNCHRONIZATION IN A MULTIPLE-CARRIER COMMUNICATION SYSTEM BY OBSERVING A PLURALITY OF SYNCHRONIZATION INDICATORS**

## **RELATED PATENT APPLICATIONS**

This patent application claims the benefit of U.S. Provisional Application No. 60/140,465, filed on June 23, 1999 and entitled "An OFDM Frequency Synchronization Lock Detection Method."

This patent application is related to U.S. patent applications entitled "Apparatus and Method for Synchronization in a Multiple-Carrier Communication System By Observing Energy Within a Guard Band" Serial number \_\_\_\_\_ (Attorney Docket No. 1999-0336A (STG181)), "Apparatus and Method for Synchronization in a Multiple-Carrier Communication System By Observing a Phase-Frequency Relationship of a Plurality of Pilot Signals", Serial number \_\_\_\_\_ (Attorney Docket No. 1999-0336A (STG182)), "Methods and Apparatus for Use in Obtaining Frequency Synchronization in an OFDM Communication System (1)", Serial number \_\_\_\_\_ (Attorney Docket No. 1999-0337 (STG163)), and "Methods and Apparatus for Use in Obtaining Frequency Synchronization in an OFDM Communication System (2)", Serial number \_\_\_\_\_ (Attorney Docket No. 1999-0338 (STG164)); all filed concurrently with this application. All related patent applications are incorporated by reference herein.

## **BACKGROUND OF THE INVENTION**

The invention relates in general to communication systems and more specifically to synchronization in a multiple-carrier communication system.

Due to advantages over other modulation techniques, communication systems utilizing multiple-carrier signals are currently being implemented for a variety of applications. Communication systems using Orthogonal Frequency Division Multiplexing (OFDM) techniques are gaining acceptance for applications such as broadcast television, mobile wireless and fixed wireless, including wireless local loop (WLL) applications. OFDM modulation techniques provide

001130 "STG162"

high data rate transmission over hostile channels with a system having a relatively low complexity. A typical wireless transmission channel subjects a transmitted signal to multi-path dispersion, resulting in numerous versions of the signal arriving at the receiver at different times. The transmitted signal is reflected and refracted through multiple transmission paths having different characteristics. The resulting interference between the versions of the signal causes inter-symbol interference (ISI) of the transmitted data. OFDM techniques typically employ a guard time between symbols to reduce ISI. Also, since OFDM utilizes multiple-carrier signals transmitted through the transmission channel, frequency-selective fading impacts a smaller portion of the transmitted data than is the case with single-carrier systems. OFDM techniques simplify the complexity of multiple-carrier receivers by using a rectangular-shaped sub-carrier for generating the multiple-carrier signals.

The performance in an OFDM system, however, is highly correlated to the synchronization between the transmitter and receiver. Small errors in frequency or timing can greatly reduce the performance of the system. Many conventional synchronization techniques are limited in that the received data must be demodulated and analyzed in order to correct for synchronization errors and as a result require significant overhead of time and processing power.

## SUMMARY OF THE INVENTION

In an exemplary embodiment of the invention, a loss of synchronization between a receiver and a transmitter is detected by observing a plurality of synchronization indicators produced by a plurality of loss of synchronization detectors which may include a guard band energy indicator, a timing error indicator and a phase-frequency slope indicator. Although various contention mechanisms may be used with the invention, a voting scheme is utilized in the exemplary embodiment that requires two or more indicators to detect a loss of synchronization for a determination that a loss of synchronization has occurred.

A phase detector is used to determine phase error or frequency error between successive waveforms. A relationship between the frequency and the phase of a plurality of pilot signals is examined to determine if the waveform

timing error exceeds a timing error threshold a number of times within a given time interval. The ratio of the guard band energy determines a frequency error. At least two pilot signals are transmitted adjacent to guard bands where one pilot is transmitted immediately below a guard band and another is transmitted immediately above another guard band. Deviations in synchronization between the transmitter and the receiver result in at least some of the energy of one of the pilot signals being received within one of the guard bands. By observing the energy within the guard bands, a loss of synchronization between the receiver and the transmitter can be detected. Resources reserved for synchronization are employed to regain synchronization after a loss of synchronization is detected.

### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is block diagram of a communication system in accordance with an exemplary embodiment of the invention.

FIG. 2 is a graphical representation of a frequency spectrum including transmitted signals in a synchronous state in accordance with the present invention.

FIG. 3 is a graphical representation illustrating the timing error between a waveform and the sampling clock at the receiver.

FIG. 4 is a graphical representation of relationship between the pilot frequency and the pilot phase in accordance with the exemplary embodiment of the invention.

FIG. 5 is a graphical representation of the frequency spectrum as received by the receiver when the receiver and the transmitter are synchronized.

FIG. 6 is a graphical representation of the frequency spectrum when a synchronization error results in a negative frequency shift.

FIG. 7 is a graphical representation of the frequency spectrum when a synchronization error results in a positive frequency shift.

FIG. 8 is flow chart of method of detecting a loss of synchronization in accordance with the exemplary embodiment of the invention.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1 is a block diagram of a communication system 100 in accordance with the exemplary embodiment of the invention. In the exemplary embodiment, the communication system 100 is a fixed wireless communication system providing communication services to a subscriber premise. A transmitter 102 transmits signals in accordance with Orthogonal Frequency Division Multiplexing (OFDM) techniques to a receiver 106 through a wireless channel 104. Those skilled in the art will recognize the various other types of communication techniques and systems that can be utilized in accordance with the present invention. Further, in the interest of brevity, one-way communication is discussed and those skilled in the art will readily apply the techniques disclosed herein to either downstream or upstream communication and to systems utilizing one-way or two-way communication links.

In addition to other circuitry known in the art, the receiver 106 includes at least a demodulator 108, a controller 110 and an energy detector 112. In the exemplary embodiment, the receiver 106 also includes at least a timing detector 114 and a phase detector 116. Although the receiver 106 components are represented by individual functional blocks, those skilled in the art will recognize that the structure of the receiver 106 may be implemented with a variety of devices, circuits and integrated circuits. Further, circuits and other functional elements may be distributed over more than one functional block denoted in FIG. 1. For example, the energy detector 112 and the demodulator 108 may access the same Digital Signal Processing (DSP) circuitry in order to perform their respective functions. Also, a phase detector and phase locked loop (PLL) can be used to measure the phase differential magnitude between pilots within different time slots as well as to provide phase information used to determine the phase-frequency relationship of pilot signals transmitted within the same time slot.

The controller 110 is any type of computer, microprocessor, processor, processor arrangement, or combination of processors that facilitates the overall functionality of the receiver 106 in addition to performing the functions described herein. In the exemplary embodiment, the controller 110 is adapted to run lines of code that direct the receiver 106 in receiving and demodulating the signals

transmitted from the transmitter 102, including execution of the loss of synchronization detection and synchronization processes.

In the exemplary embodiment, the demodulator 108 includes radio frequency (RF) circuitry and analog-to-digital (A/D) conversion circuitry in addition to digital signal processing (DSP) circuitry for demodulating the OFDM signals. The demodulator 108 may be implemented using a digital circuit, such as an Application Specific Integrated Circuit (ASIC), that performs a Fast Fourier Transform (FFT) on the digitized time series and a DSP processor that performs arithmetical operations on the FFT output. The FFT output is an array of complex values often referred to as tones, which consist of in-phase (I) and quadrature (Q) components.

The phase detector 116, energy detector 112 and timing detector 114, in conjunction with the controller 110, form a plurality of synchronization detectors 118, 120, 122 in the exemplary embodiment. Each of the synchronization detectors (118, 120, 122) produces a synchronization indicator in accordance with the parameters measured by the particular synchronization detector (118, 120, 122).

An energy detector 112 and controller 110 form an energy guard band synchronization detector 118 that provides a guard band energy synchronization indicator based on the energy measured within a guard band.

A phase-frequency slope synchronization detector 120 formed by the timing detector 114, phase detector 116, and the controller 110 provides a phase-frequency synchronization indicator based on the phase-to-frequency relationship of a plurality of received pilot signals where the pilot signals are transmitted at different frequencies. The phase offset of each received pilot signal is different for each pilot signal if the receiver 106 is not synchronized to the transmitter 102. As explained further below, the system 100 attempts to adjust the timing of the receiver 106 when a timing error is detected. In the exemplary embodiment, if the number of timing adjustments within a given time period exceeds a timing adjustment occurrence threshold (occurrence threshold), the timing error synchronization indicator indicates that a loss of synchronization has occurred.

The phase detector 116 and the controller 112 form a phase differential magnitude synchronization detector (phase magnitude synchronization detector) 122 that provides a phase differential magnitude synchronization indicator (phase magnitude synchronization indicator) based on the magnitude of the phase of a received pilot signal for different time slots. The phase differential magnitude synchronization detector 122, therefore, tracks the phase of pilot signals over time and indicates an error when the magnitude exceeds a phase threshold. Those skilled in the art will recognize that such a phase differential magnitude synchronization detector is subject to aliasing error if the frequency error exceeds one-half of the inverse of the time interval between timeslots.

The energy detector 112 measures energy within a given frequency spectrum dictated by the controller 110 and may be implemented in a variety of ways. In the exemplary embodiment, the energy detector 112 is implemented in the DSP processor in accordance with known techniques. The energy detector 112 sums the squares of the I and Q components of the signals contained within the frequency bandwidth associated with each guard band to determine the energy contained within the guard band. The guard band energy synchronization detector 118 formed by the energy detector 112 and the controller 110 indicates a frequency error when energy within the guard bands is detected. As discussed below in reference to FIG. 6, when the receiver 106 and the transmitter 102 are synchronized, the pilot signals are within the transmission band. When a frequency error occurs, one of the pilot signals will be received within one of the guard bands, and the pilot signal energy leaking into the guard band will cause the output of the energy detector 112 to increase. The resulting guard band energy synchronization indicator produced by the guard band energy synchronization detector 118 indicates that a loss of synchronization has occurred when energy within the guard band measured by the energy detector 112 is higher than an energy threshold. In the exemplary embodiment, a ratio of the energies within two guard bands is compared to a threshold.

The timing detector 114 indicates a time rate of change of a waveform timing error resulting from an offset between a received pilot signal waveform and a receive window. The receive window is dictated by a sampling clock derived



from the oscillator (not shown) on the receiver 106. When the sampling clock is not perfectly synchronized to the waveform timing, the timing error results as is discussed below in reference to FIG. 3. The phase of each received pilot signal is directly proportional to the timing error and the frequency of the particular pilot signal. Therefore, for any given timing offset, the phase offset will increase as the frequency of the pilot signal is increased. By transmitting several pilot signals having different frequencies, a linear plot of a phase versus frequency can be used to represent the phase-frequency relationship as discussed below in reference to FIG. 4. An example of a suitable implementation and method is discussed in U.S. Patent Number 5,799,000 entitled "Delay Compensation" issued August 25, 1998 by Elliot Hoole. The receiver 106 receives uniformly spaced pilot signals through the demodulator 108. The pilot signals are digitized, sampled, passed through a Fast Fourier Transform (FFT) processor and stored in the FFT incremental frequency bins as complex numbers. The phase for each pilot signal is computed from each pilot complex value in the DSP processor using methods consistent with known techniques. Since the pilot phase dependence on pilot frequency is linear, the linear relationship may be calculated from measured data using well-known curve fitting techniques and linear regression algorithms.

The phase differential magnitude indicator produced by the phase differential magnitude detector 122 indicates the phase difference of a pilot signal received in successive time intervals. The phase detector 116 may be implemented using any one of several techniques, including using a phase detector device and PLL to provide a phase error signal having a magnitude based on the change in phase of the received signal. In the exemplary embodiment, the phase detector device and PLL are implemented in the DSP processor and are used to compute a low-pass filtered value of the phase differential. The measured phase value for a current time slot is compared to phase values measured for a previous time slot to determine the phase differential magnitude that indicates whether the system is out of synchronization.

By observing the three indicators, the controller 110 can accurately detect a loss of synchronization resulting in the implementation of a synchronization process that corrects for timing and frequency errors between the receiver 106 and

transmitter 102. Any one of several synchronization procedures can be used to synchronize the receiver to the transmitter 102 in response to the detection of a loss of synchronization. An example of a suitable synchronization method and apparatus is discussed in co-pending United States Patent Application serial  
 5 number \_\_\_\_\_ filed on \_\_\_\_\_ and entitled "Methods And Apparatus For Use In Obtaining Frequency Synchronization In An OFDM Communication System".

FIG. 2 is a graphical representation of a frequency spectrum 200 including transmitted signals 202 in accordance with the present invention. In the exemplary  
 10 embodiment, the plurality of transmitted signals 202 are transmitted within a transmission band 210 and include at least a lower pilot signal 204, an upper pilot signal 206, and at least one data signal 208. In the exemplary embodiment, eight pilot signals 204, 205, 206 are transmitted in addition to a plurality of data signals 208. The transmission band 210 is bounded by an upper guard band 212 and a  
 15 lower guard band 214 in which no signals are intentionally transmitted. The lower pilot signal 204 is transmitted immediately above and adjacent to the lower guard band 214 while the upper pilot signal 206 is transmitted immediately below and adjacent to the upper guard band 212. In other embodiments, the transmitted signals 202 may include additional pilot signals 205. Each of the transmitted  
 20 signals 202 is an orthogonal narrow band carrier and is transmitted using known techniques.

FIG. 3 is a graphical representation illustrating the timing error 306 between a waveform 304 and the sampling clock at the receiver 106. When the receiver clock differs from the transmitted signal frequency, the timing error 306  
 25 occurs in the time domain as shown in FIG. 2. The time error is manifested as a linear relationship between the pilot frequencies and pilot signal phases. Since the time error is directly related to the slope of the phase ramp of FIG. 4, a horizontal phase ramp corresponds to zero time error; and a phase ramp with nonzero slope is directly proportional to the time error. In the exemplary embodiment, this slope is  
 30 continually monitored by the DSP processor which readjusts the receiver time window 302 to obtain a zero slope phase ramp whenever the phase ramp slope exceeds a threshold. Excessive adjustment of the receiver time window 302 within

a specified period of time indicates a loss of frequency lock. Another example of a method of observing the phase-frequency relationship of the received pilot signals includes determining that a loss of synchronization has occurred if a threshold is exceeded.

5           FIG. 4 is a graphical representation of relationship between the pilot frequency and the pilot phase. When a frequency offset occurs between the transmitter 102 and the receiver 106, the linear relationship between pilot frequencies and the pilot signal phases can be illustrated by the upward sloping line in FIG. 4. Each data point 404 along the line 402 corresponds to a pilot signal  
10 (204, 205, 206). Since the multiple pilots signals 204, 205, 206 are spaced in frequency, a synchronization error results in different phase values for each pilot signal (204, 205, 206). The slope of the line 402 corresponds to the timing error 306.

          FIG. 5 is a graphical representation of the frequency spectrum 200 of  
15 received signals 502 corresponding to the transmitted signals 202 as received by the receiver 106 when the receiver 106 and the transmitter 102 are synchronized. In addition to the received data signals 508, the receiver 106 receives the lower pilot signal 504, the pilot signals 505 and the upper pilot signal 506. When the receiver 106 and the transmitter 102 are synchronized, the upper pilot signal 506  
20 and the lower pilot signal 504 are received within the transmission band 210. If the energy within the lower guard band 214 is represented by L and the energy representing the energy within the upper guard 212 band is represented by U, the ratio of the energies (U/L) is approximately equal to one. Therefore, the contribution of the energies from each of the pilot signals 504, 506 within the  
25 adjacent guard band 214, 212 is approximately the same when the transmitter 102 and the receiver 106 are synchronized.

          FIG. 6 is a graphical representation of the frequency spectrum 600 when a synchronization error results in a negative frequency shift of the received signals 502. The lower pilot signal 504 is received within the lower guard band 214 due to  
30 the frequency offset. Therefore, the energy detector 112 detects more energy in the lower guard band 214 than in the upper guard band 212, resulting in an energy ratio (U/L) less than one. If the energy ratio falls below a lower predetermined

threshold, the controller 110 indicates that an out-of-synchronization status has occurred.

FIG. 7 is a graphical representation of the frequency spectrum 700 when a synchronization error results in a positive frequency shift of the received signals 502. The upper pilot signal 506 is received within the upper guard band 212 due to the frequency offset. Therefore, the energy detector 112 detects more energy in the upper guard band 212 than in the lower guard band 214, resulting in an energy ratio (U/L) greater than one. If the energy ratio rises above a upper predetermined threshold, the controller 110 indicates that an out-of-synchronization status has occurred and the synchronization procedure is performed.

FIG. 8 is a flow chart of a method of detecting a loss of synchronization in accordance with the exemplary embodiment of the invention. As described above, the exemplary embodiment utilizes three synchronization indicators to determine that a loss of synchronization between the transmitter 102 and the receiver 106 has occurred. A voting scheme is used to determine whether the receiver 106 is synchronized to the transmitter 102. If a majority of the synchronization indicators provide a loss of synchronization indication, the receiver 106 is determined to be out of synchronization with the transmitter 102. In other embodiments, each of the indicators discussed may be used independently or with other types of synchronization indicators in other arrangements and combinations. Further, the information from each indicator may be analyzed and combined in different ways and orders to determine whether a loss of synchronization situation has occurred.

At step 802, the receiver 102 receives the transmitted spectrum 200 including a plurality of pilot signals (204-208). In the exemplary embodiment, eight pilot signals 204, 205, 206 are transmitted in addition to data signals 208.

At step 804, a waveform timing error is measured by observing the phase to frequency relationship of the plurality of pilot signals 204-206 transmitted from the transmitter 102. At least two pilot signals (204-206) are used for computing a phase ramp slope (phase-frequency relationship); and in the exemplary embodiment, the eight pilot signals 204-206 are transmitted and received for computing the phase ramp slope of a line defining the relationship between the frequency and phase of the pilot signals. As described above, the linear

relationship between phase and frequency may be calculated from measured data using well-known curve fitting techniques and linear regression algorithms.

At step 806, it is determined whether the phase ramp slope is greater than a timing threshold. If the slope exceeds a given timing threshold, the timing of the receiver 106 is adjusted in accordance with the timing offset at step 808 and a counter is incremented in step 810. If the slope does not exceed the timing threshold, the procedure continues at step 816.

At step 812 the number of timing adjustments performed in a specified time period is compared to an occurrence threshold. Since a timing adjustment is made when the phase ramp slope exceeds the timing threshold, the number of timing adjustments is the same as the number of times the slope of the phase frequency relationship exceeds the timing threshold. If the counter value exceeds the occurrence threshold within a specified time period in step 812, the phase-frequency synchronization detector 120 indicates a loss of synchronization at step 814. Otherwise, the procedure continues at step 816.

At step 816, the receiver 106 measures a phase difference between the current and previous instance of at least one pilot signal (202-206) received from the transmitter 102.

At step 818, the phase error is compared to a phase error threshold to determine if, according to the phase detector 116, the receiver 106 has lost synchronization. If the phase error is greater than the phase error threshold, the phase detector 116 indicates that a loss of synchronization has occurred at step 820. Otherwise, the receiver 106 determines that the phase detector 116 indicates that the receiver 106 is synchronized with the transmitter 102 and the procedure continues at step 822.

At step 822, the energy within each of the guard bands (212, 214) is measured. As described above, the energy detector 112 sums the squares of the I and Q components of the signals contained within the frequency bandwidth associated with each guard band (212, 214) to determine the energy contained within the guard bands (212, 214).

At step 824, the ratio of the upper guard band 212 to the lower guard band 214 (guard band energy ratio) is compared to a range. If the guard band energy

ratio is within the range, the energy guard band synchronization detector indicates that the receiver 106 is synchronized to transmitter 102. If the guard band energy ratio is outside the range, the procedure continues to step 826 where it is determined that the energy guard band indicator indicates a loss of  
 5 synchronization. If the guard band energy ratio is within the range, the procedure continues at step 828.

At step 828, it is determined whether the synchronization indicators collectively indicate a loss of synchronization. In the exemplary embodiment it is determined whether two or more indicators indicate that a loss of synchronization  
 10 has occurred. Those skilled in the art will recognize the various other arrangements and techniques for implementing step 828. For example, a scheme may be used where only a unanimous indication of a loss of synchronization by the synchronization indicators denotes loss of synchronization.

If a loss of synchronization has occurred, the procedure continues to step  
 15 830 where a resynchronization is performed. As described above, any one of several techniques may be used to synchronize the receiver 106 to the transmitter 102. An example of a suitable method is described in co-pending United States Patent Application serial number \_\_\_\_\_ filed on \_\_\_\_\_ and entitled "Methods And Apparatus For Use In Obtaining Frequency Synchronization In An  
 20 OFDM Communication System". After performing the synchronization, or if no synchronization is required, the procedure returns to step 802.

Clearly, other embodiments and modifications of this invention will occur readily to those of ordinary skill in the art in view of these teachings. Therefore, this invention is to be limited only by following claims, which include all such  
 25 embodiments and modifications when viewed in conjunction with the above specification and accompanying drawings.

WHAT IS CLAIMED IS:

## CLAIMS

1. A method of detecting a loss of synchronization between a transmitter and a receiver:

evaluating a plurality of synchronization indicators to detect a loss  
5 of synchronization between a transmitter and a receiver in a wireless communication system.

2. A method in accordance with claim 1, wherein evaluating comprises:  
determining loss of synchronization when a majority of the  
10 plurality of synchronization indicators indicate the loss of synchronization.

3. A method in accordance with claim 1, further comprising:  
producing each of the plurality of synchronization indicators by  
one of a plurality of synchronization detectors.  
15

4. A method in accordance with claim 3, wherein producing comprises:  
producing a guard band energy synchronization indicator based on  
the energy measured within a guard band.

5. A method in accordance with claim 3, wherein producing comprises:  
producing a phase magnitude differential synchronization indicator  
based on a difference in a first pilot signal phase of a pilot signal received in a first  
time slot and a second pilot signal phase of the pilot signal received in a second  
time slot.  
20

6. A method in accordance with claim 3, wherein the producing comprises:  
producing a phase-frequency synchronization indicator based on a  
phase frequency relationship of a plurality of pilot signals having different  
frequencies.  
25

7. A method in accordance with claim 3, wherein producing comprises:  
30

producing a phase magnitude differential synchronization indicator based on a difference in a first pilot signal phase of a pilot signal received in a first time slot and a second pilot signal phase of the pilot signal received in a second time slot; and

8. A method in accordance with claim 7 wherein producing the guard band energy synchronization indicator comprises:

detecting a loss of synchronization between the transmitter transmitting the pilot signal and the receiver in accordance with the energy level.

10. A method in accordance with claim 9, further comprising:  
measuring another energy level of another pilot signal within  
another frequency guard band, the another pilot signal transmitted adjacent to the  
another frequency guard band, wherein detecting loss of synchronization  
comprises comparing a threshold to a ratio of the energy level with respect to the  
another energy level.



11. A method in accordance with claim 10, wherein comparing the ratio comprises:

detecting loss of synchronization if the ratio is outside a range.

5 12. A method in accordance with claim 7, wherein the producing a phase-frequency synchronization indicator comprises:

detecting loss of synchronization based on a slope of a line defined by a relationship between the frequency and the phase of the plurality of pilot signals.

10

13. A method in accordance with claim 12, wherein detecting the loss of synchronization comprises detecting loss of synchronization based on a number of slope-exceeding occurrences within a time period.

15

14. A method in accordance with claim 13, wherein detecting further comprises counting the number of slope-exceeding occurrences by counting a number of observed values greater than the timing threshold of the slope of the line defined by the relationship between the frequency and the phase of the plurality of pilot signals.

20

15. A receiver adapted to detect a loss of synchronization between the receiver and a transmitter comprising:

a plurality of synchronization detectors adapted to detect a loss of synchronization between a transmitter and the receiver, each of the plurality of synchronization detectors producing a synchronization indicator to provide a plurality of synchronization indicators; and

25

a controller adapted to evaluate the plurality of synchronization indicators to establish the loss of synchronization between the transmitter and the receiver.

30

16. A receiver in accordance with claim 15, wherein the controller is further adapted to determine loss of synchronization if a majority of the plurality of synchronization indicators indicate loss of synchronization.

5           17. A receiver in accordance with claim 15, wherein the plurality of synchronization detectors comprise:

                  a guard band energy synchronization detector adapted to produce a guard band energy synchronization indicator based on energy measured within a guard band;

10               a phase magnitude differential synchronization detector adapted to produce a phase magnitude differential synchronization indicator based on the difference in a first pilot signal phase of a pilot signal received in a first time slot and a second pilot signal phase of the pilot signal received in a second time slot; and

15               a phase-frequency synchronization detector adapted to produce a phase-frequency synchronization indicator based on a phase frequency relationship of a plurality of pilot signals having different frequencies, wherein the evaluating comprises determining loss of synchronization if at least two of the plurality of synchronization indicators indicate the loss of synchronization has  
20               occurred.

                  18. A receiver in accordance with claim 17 wherein the guard band energy synchronization detector is further adapted to:

                  measure an energy level of a pilot signal within the frequency guard band, wherein the pilot signal is transmitted adjacent to the frequency guard band; and

                  detect the loss of synchronization between the transmitter transmitting the pilot signal and the receiver in accordance with the energy level.

30           19. A receiver in accordance with claim 18, wherein the guard band energy synchronization detector is further adapted to produce the guard band energy

synchronization indicator indicating loss of synchronization if the energy within the guard band is above a threshold.

20. A receiver in accordance with claim 19, wherein the guard band energy  
5 synchronization detector is further adapted to measure another energy level of  
another pilot signal within another frequency guard band, the another pilot signal  
transmitted adjacent to the another frequency guard band, wherein the guard band  
synchronization indicator indicates the loss of synchronization based on a  
comparison between a threshold and a ratio of the energy level to the another  
10 energy level.

21. A receiver in accordance with claim 20, wherein the guard band  
synchronization indicator indicates the loss of synchronization if the ratio is  
outside a range.

22. A receiver in accordance with claim 17, wherein the phase-frequency  
synchronization detector is adapted to detect loss of synchronization based on a  
slope of a line defined by a relationship between the frequency and the phase of  
the plurality of pilot signals.

23. A receiver in accordance with claim 22, wherein the phase-frequency  
synchronization detector is further adapted to detect loss of synchronization based  
on a number of slope-exceeding occurrences within a time period.

24. A method in accordance with claim 23, wherein the phase-frequency  
synchronization detector is further adapted to count the number of slope-  
exceeding occurrences by counting a number of observed values greater than the  
timing threshold of the slope of the line defined by the relationship between the  
frequency and the phase of the plurality of pilot signals.

**APPARATUS AND METHOD FOR SYNCHRONIZATION IN A  
MULTIPLE-CARRIER COMMUNICATION SYSTEM BY OBSERVING A  
PLURALITY OF SYNCHRONIZATION INDICATORS**

5

**ABSTRACT OF THE INVENTION**

A method, apparatus and system detects a loss of synchronization between a transmitter and a receiver in a multiple-carrier communication system such as an OFDM system. A plurality of synchronization indicators are observed to

10 determine whether a loss of synchronization between a transmitter and a receiver in the wireless system has occurred. In one embodiment, the receiver is determined to have lost synchronization with the transmitter if two or more of the three synchronization indicators indicate a loss of synchronization. In such an

15 embodiment, the three synchronization indicators include a timing error indicator, an energy guard band indicator and a phase-frequency slope indicator.

[illegible]

[illegible]

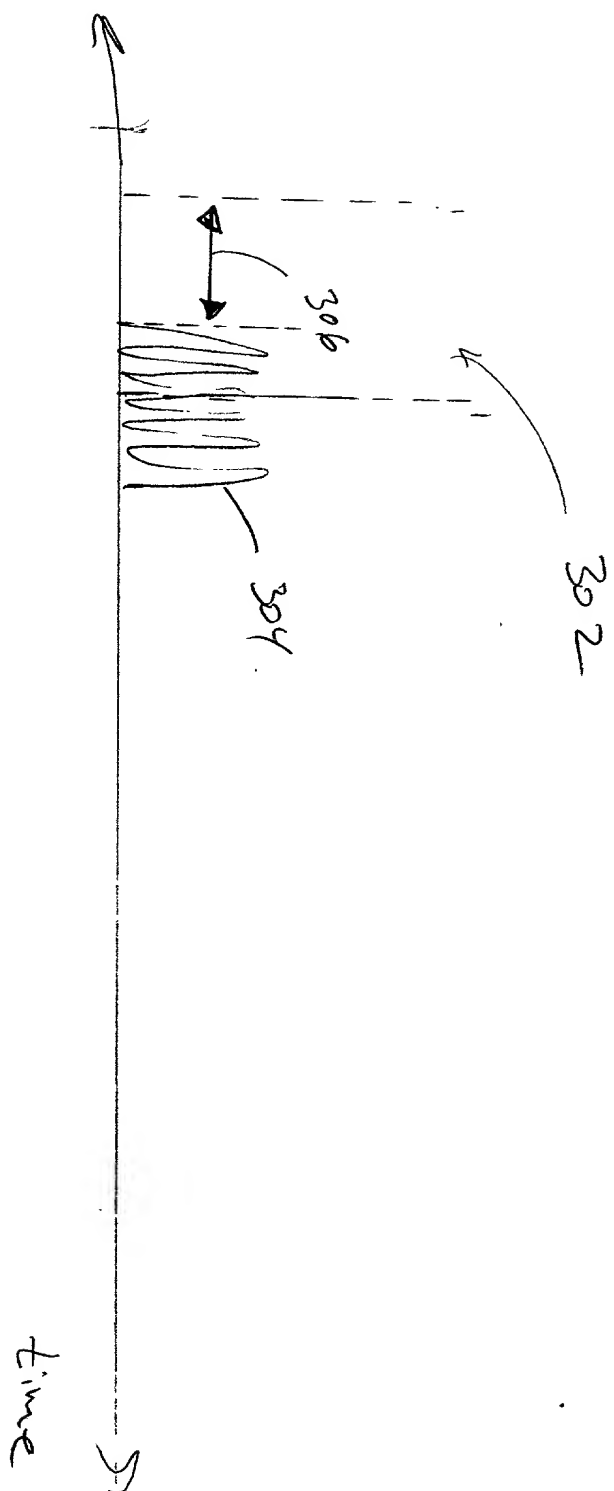
[illegible]







FIG 6

00003315 061400

600



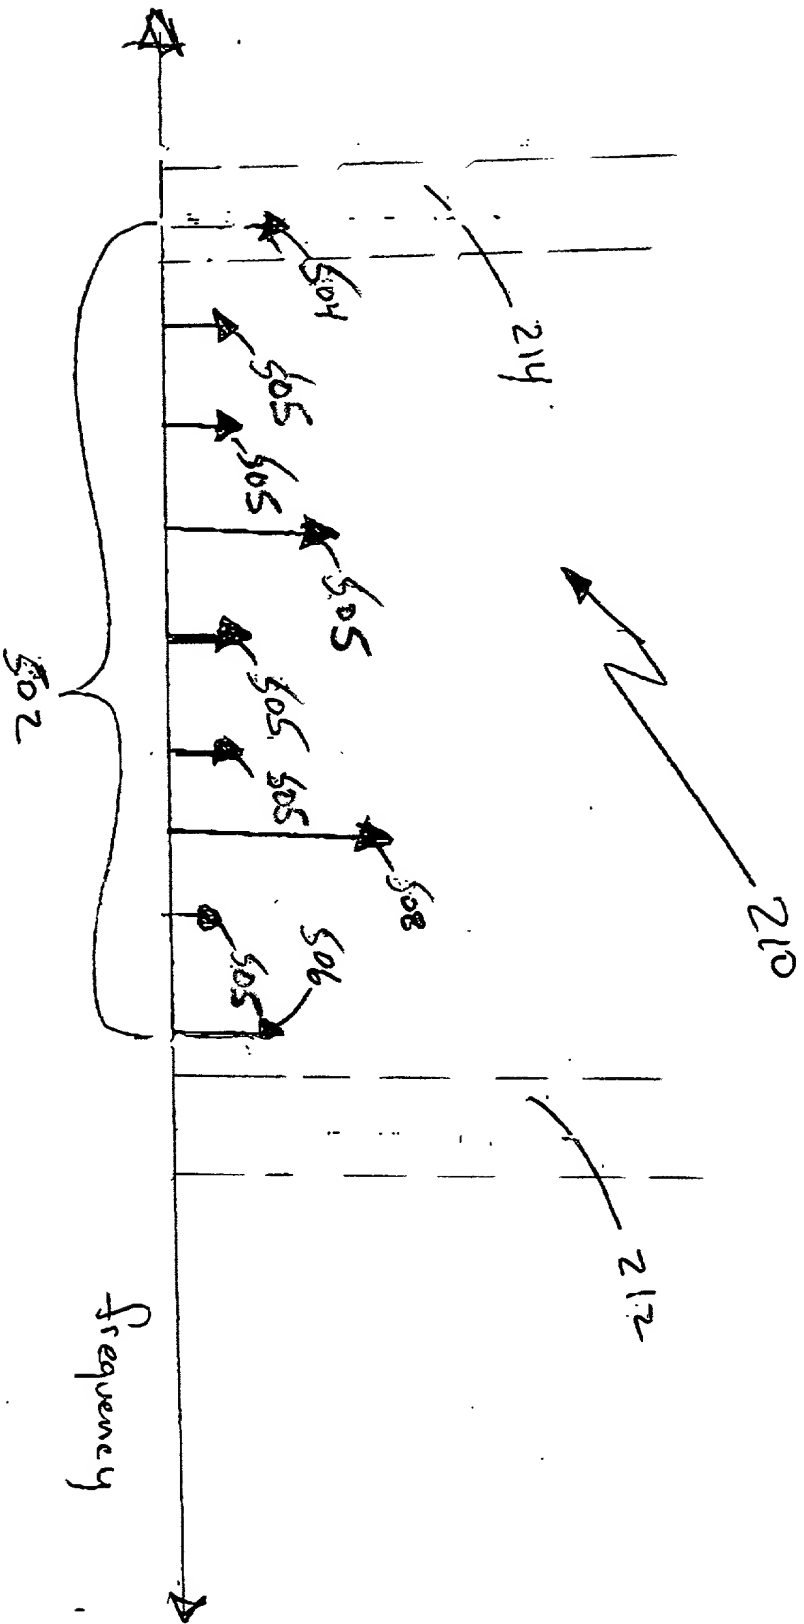


FIG. 7

100

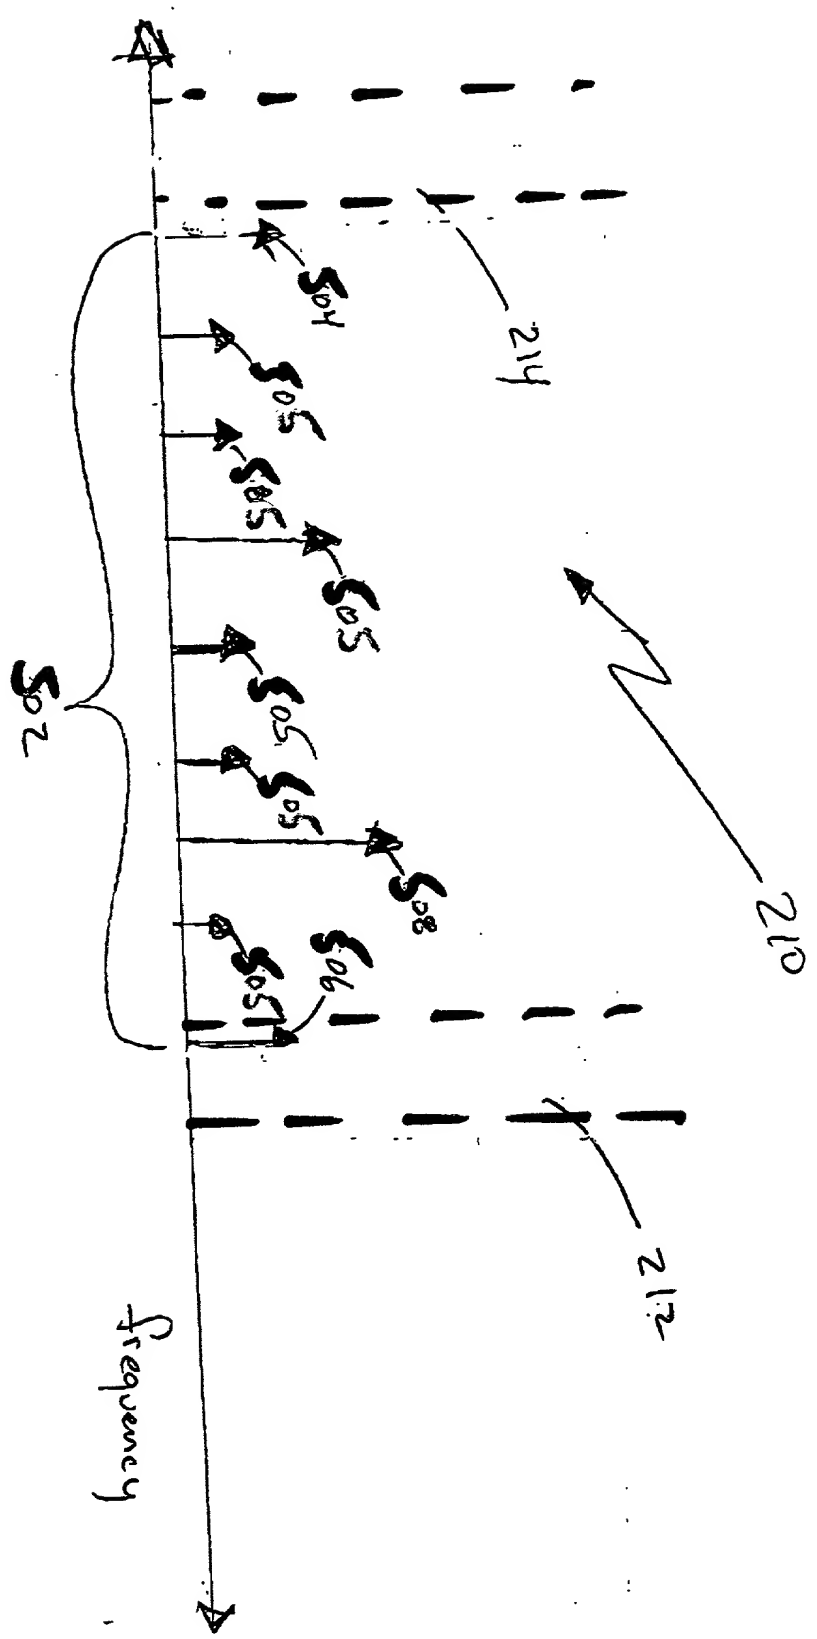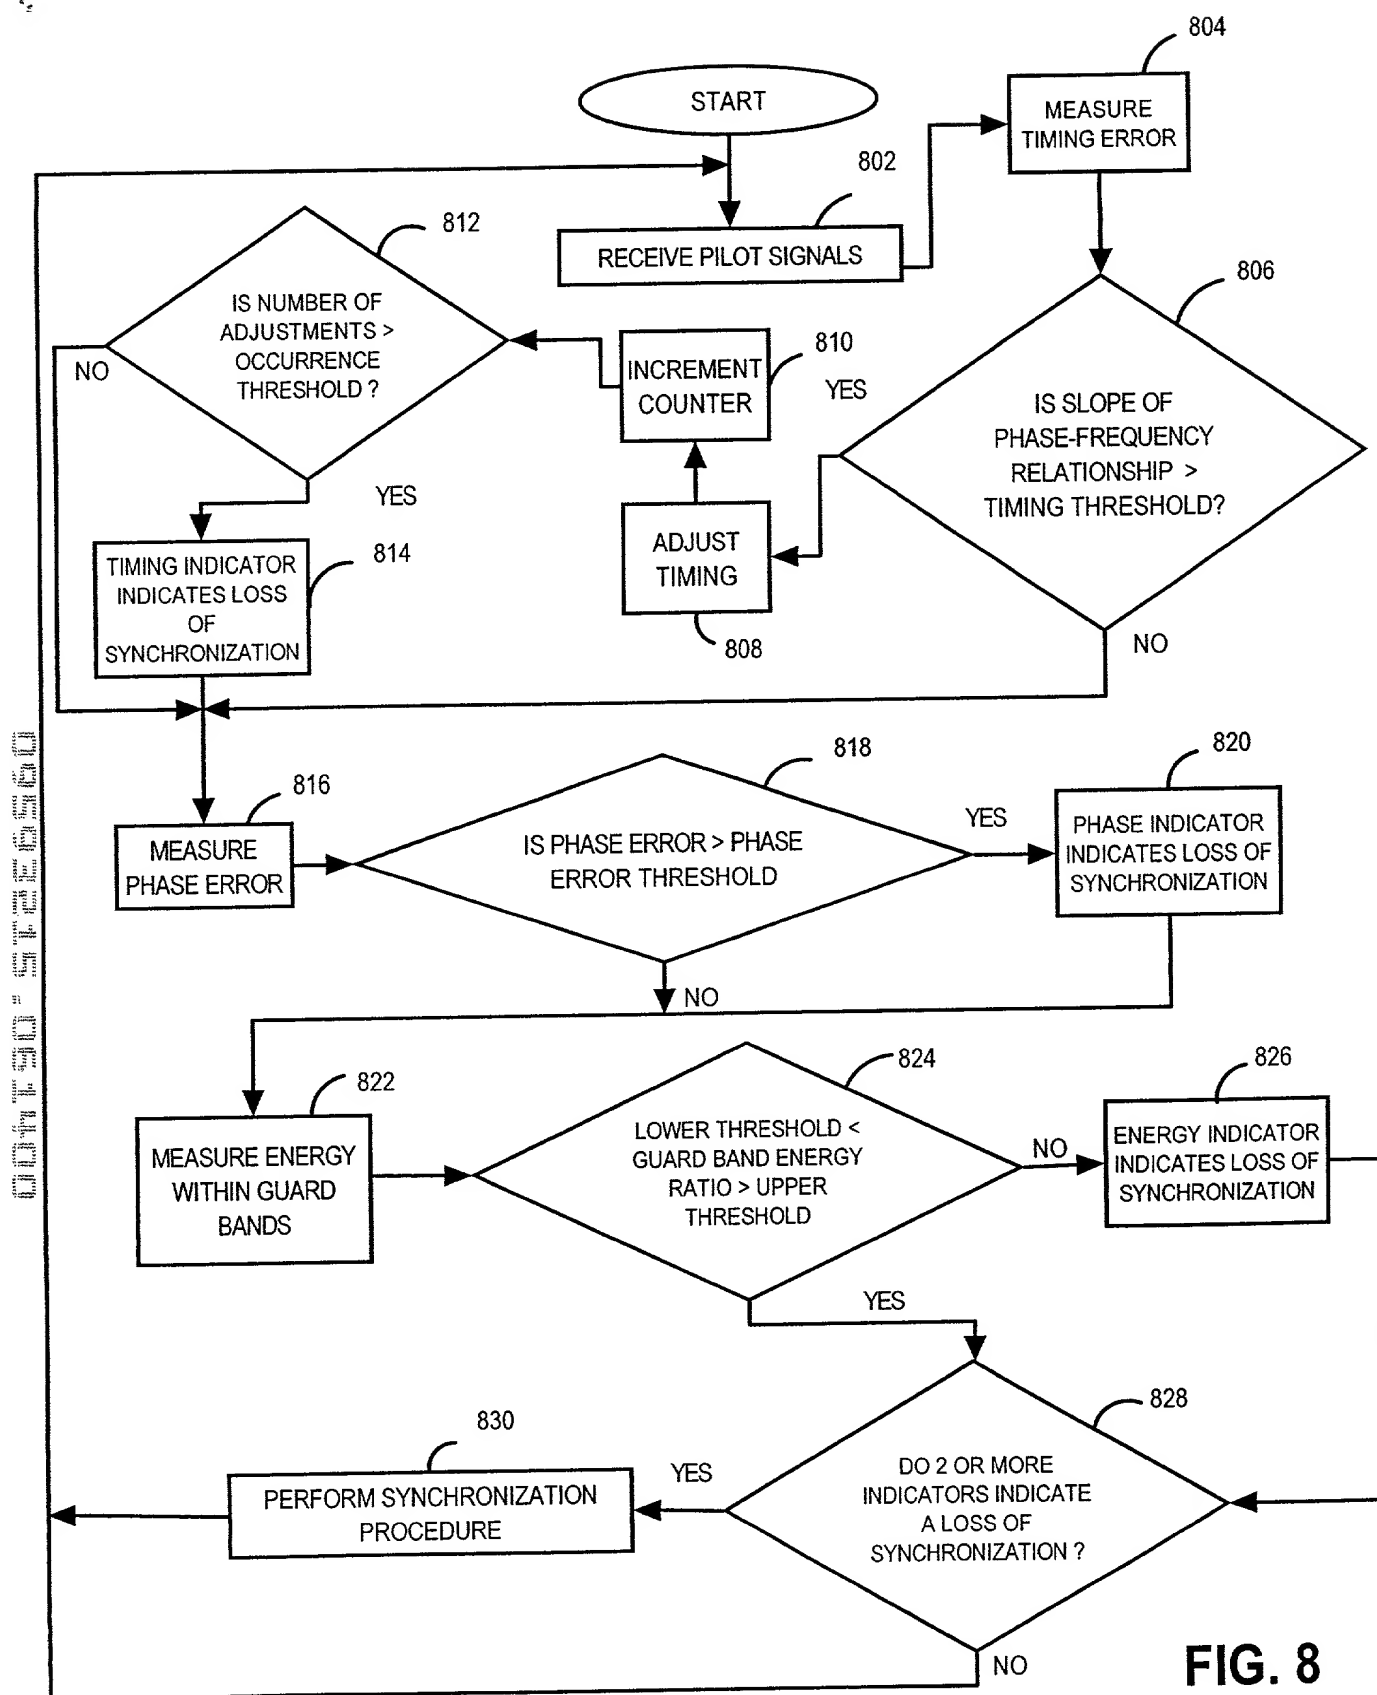

09693345 061400



**FIG. 8**

IN THE UNITED STATES  
PATENT AND TRADEMARK OFFICE

**Declaration and Power of Attorney**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **APPARATUS AND METHOD FOR SYNCHRONIZATION IN A MULTIPLE-CARRIER COMMUNICATION SYSTEM BY OBSERVING A PLURALITY OF SYNCHRONIZATION INDICATORS**, the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment, if any, specifically referred to in this oath or declaration.

I acknowledge the duty to disclose all information known to me which is material to patentability as defined in Title 37, Code of Federal Regulations, 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, 119(a-d) or 365(a-b) of PCT or foreign application(s) for patent or inventors' certificate listed below or priority benefits under 119(e) of any United States provisional application(s) listed below and have also identified below any foreign application for patent or inventors' certificate having a filing date before that of the application on which priority is claimed:

***U.S. Provisional Application Serial No. 60/140,465 , filed June 23, 1999***

I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, we acknowledge the duty to disclose all information known to us to be material to patentability as defined in Title 37, Code of Federal Regulations, 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

**[ None ]**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorney(s) with full power of substitution and revocation, to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:

Michele L. Conover	Reg. No. 34,962
Cedric G. DeLaCruz	Reg. No. 36,498
Samuel H. Dworetsky	Reg. No. 27,873
Rohini K. Garg	Reg. No. 45,272
Thomas M. Isaacson	Reg. No. 44,166
Benjamin S. Lee	Reg. No. 42,787
Robert B. Levy	Reg. No. 28,234
Susan E. McHale	Reg. No. 35,948
Gary H. Monka	Reg. No. 35,390
Jeffrey M. Navon	Reg. No. 32,711
Thomas A. Restaino	Reg. No. 33,444
Alfred G. Steinmetz	Reg. No. 22,971

I also appoint the following registered practitioners of Gray, Cary Ware & Freidenrich as associate attorneys with full power to prosecute said application, to make alterations and amendments therein, and to transact all business in the Patent and Trademark Office connected therewith.

James P. Cleary	Reg. No. 45,843	John J. Oskorep	Reg. No. 41,234
Travis L. Dodd	Reg. No. 42,491	Steven R. Sprinkle	Reg. No. 40,825
Charles D. Gavrilovich, Jr.	Reg. No. 41,031	Mark M. Takahashi	Reg. No. 38,631
Gerald W. Maliszewski	Reg. No. 38,054	Barry N. Young	Reg. No. 38,631
Terrance A. Meador	Reg. No. 30,298		

Please address all correspondence to Mr. S. H. Dworetsky, AT&T Corp., P.O. Box 4110, Middletown, New Jersey 07748-4110. Telephone calls should be made to Samuel H. Dworetsky at 908-221-5234. The facsimile number is 732-368-6932.

Full name of 1<sup>st</sup> joint inventor: JARI M. HEINONEN

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence: 2319 1<sup>st</sup> Avenue, Apartment #604  
Seattle, Washington 98121

Citizenship: Finland

Post Office Address: 2319 1<sup>st</sup> Avenue, Apartment #604  
Seattle, Washington 98121

Full name of 2<sup>nd</sup> joint inventor: MICHAEL R. HIRANO

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence: 9309 138<sup>th</sup> Court NE  
Redmond, Washington 98052

Citizenship: U.S.

Post Office Address: 9309 138<sup>th</sup> Court NE  
Redmond, Washington 98052

Full name of 3<sup>rd</sup> joint inventor:

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence:

Citizenship:

Post Office Address: